BS-240Pro

Chemistry Analyzer

Technical Specifications

System function

Automatic, Discrete, Random Access, Bench-top

STAT sample priority

Throughput: Constant 240 photometric tests per

hour, up to 400 T/H with ISE

Measuring principles: Absorbance photometry,

turbidimetry, ion selective electrode

technology

Methodology: End-point, Fixed-time, Kinetic,

optional ISE,

Single/Double reagent chemistries,

Mono-chromatic / bi-chromatic

Original system pack reagent ready to use Close system and open system is optional

Reagent/Sample Handling

Reagent/Sample tray: 50 to 100 positions for reagents and 50

to 100 positions for samples in 24-hour

refrigerated compartment (2~12°C)

Reagent volume: R1: $100\sim200\mu L$, step by $0.5\mu L$

R2: 10~200μL, step by 0.5μL

Sample volumne: $2\sim35\mu$ L, step by 0.1μ L

Reagent/Sample probe: Liquid level detection, horizontal and

vertical collision protection, inventory

checking, reagent pre-warming,

optional clog detection

Probe cleaning: Automatic washing for interior and

exterior

Carry over < 0.05%

Automatic sample dilution: Pre-dilution and post-dilution

Mixing Unit: Independent mixing bar

Built-in Bar Code Reader (Optional)

Used for sample and reagent programming

Be applicable to various bar code systems of Codabar, ITF (Interleaved Two of Five), code128, code39, UPC/EAN, Code93 Capable to communicate with LIS in bi-directional mode **Reaction System**

Reaction tray: 80 reusable cuvettes

Reaction volume: $100\sim360\mu L$ Reaction temperature: $37^{\circ}C\pm0.1^{\circ}C$

Cuvette Washing: Washing station with pre-warmed

detergent and de-ionized water

ISE Module (optional)

Measuring K+, Na+, Cl-

Optical System

Light Source: Halogen-tungsten lamp

Wavelength: 12 wavelengths, 340nm, 380nm, 412nm,

450nm, 505nm, 546nm, 570nm, 605nm,

660nm, 700nm, 740nm, 800nm

Absorption range: 0~3.5Abs, resolution 0.0001Abs Stray Light: 4.9Abs

Control and Calibration

Calibration modes: K factor, Linear (two points and

multi-points), Logit-Log 4P, Logit-Log 5P, Spline, Exponential, Polynomial, Parabola,

Logit-Log3P, Broken line

One key calibrator import function Westgard multi-rule, Levey-Jennings,

Cumulative sum check, Twin plot

Operation Unit

Control Rules:

Operation system: Windows 10 Interface: RS-232

Working Conditions

Power Supply: 200~240V, 50/60Hz, ≤1300VA or

100~130V, 60Hz, ≤1300VA

Dimension: 860 mm (length) \times 660 mm (depth) \times

550 mm (height)

Weight: 115 kg Water Consumption: ≤6.5 L/H

129626, Москва, проспект Мира, дом 102, корпус 1, этаж 6, к. 6 Телефон: 8 (800) 555-73-87 Email: info@medeq.ru mindray




BS-240Pro

Chemistry Analyzer

Compact yet Robust



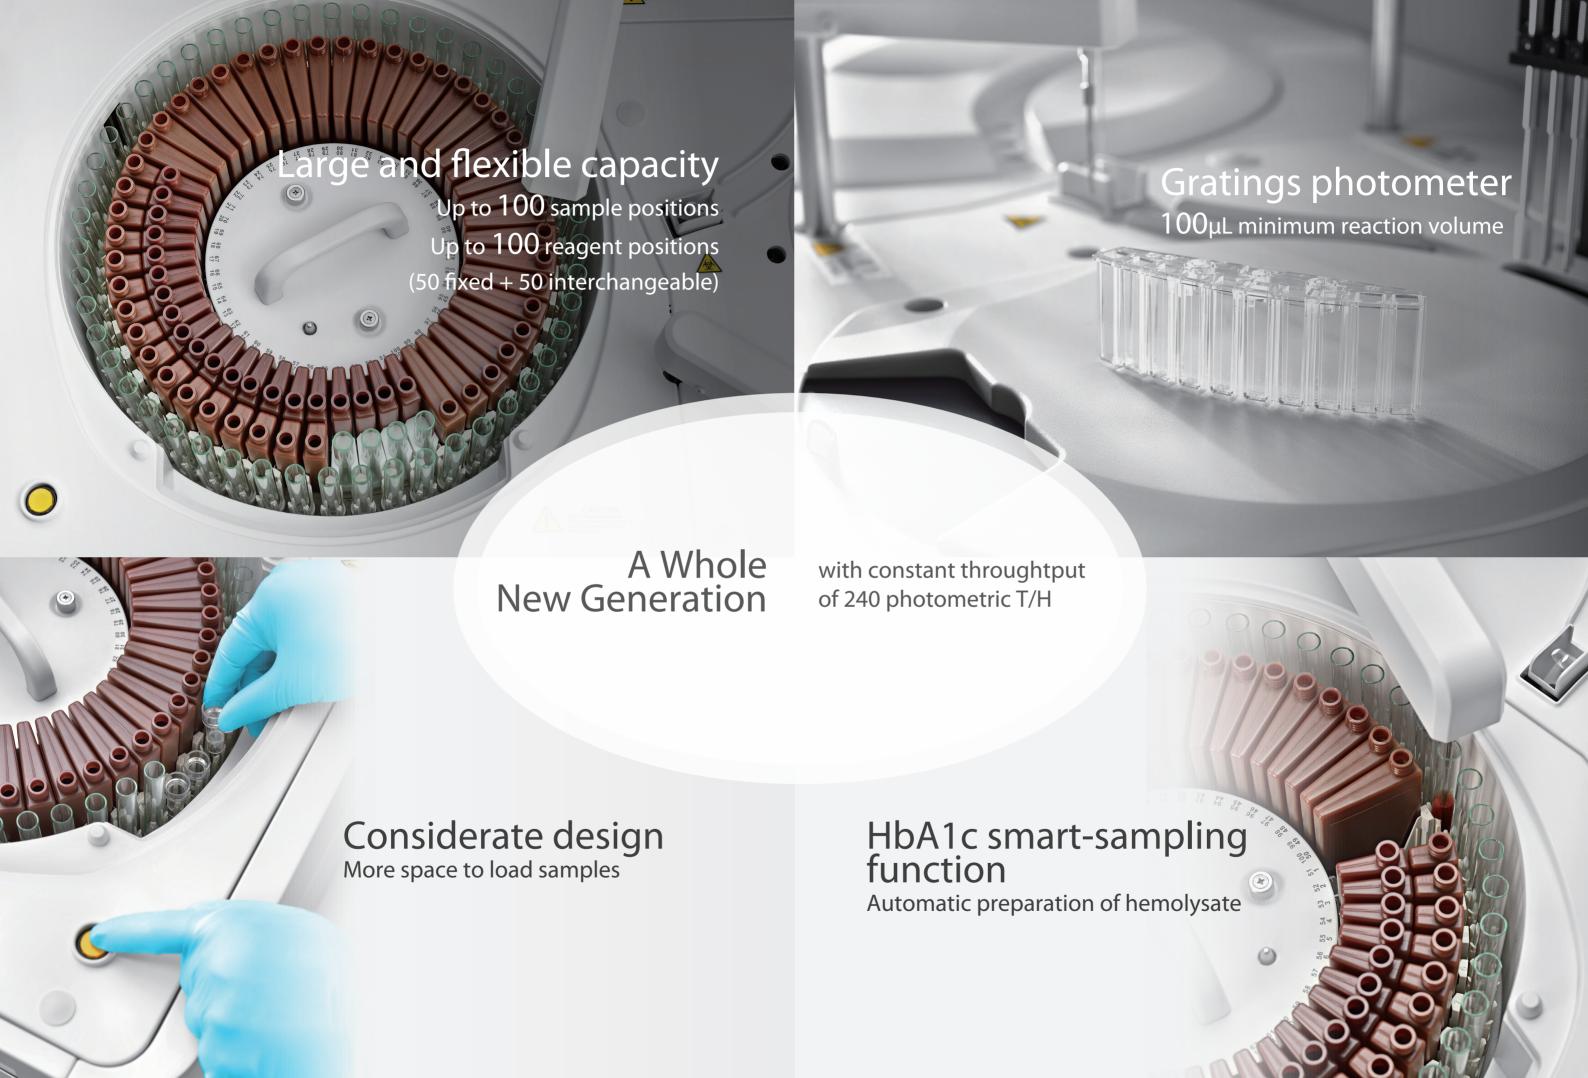

BS-240ProChemistry Analyzer



Waterfall probe cleaning



Intelligent probe with optional clog detection



Constant throughput



Independent mixing bar



Optimized washing station



mindray BS-240Pro



Built-in barcode reader



Optional ISE module easy to access


	Samp		Quality Con	arol .	Status				
Program	ID []	Ce	d 1	Pos 1	STAT	Sample Type	Serum V	Status	
	Bar Code			0	Comment		~	Patient ID	
Result	\$1	Ca	P	T-Ba-V	ALT	y-GT	TP	TG	UREA
Reagent	LDH	Mg	GSPD	Glu-H	Glu-G	D-81-V	D-68-D	T-bill D	ADA
	PA	TBA	AST	ALP	Lp(a)	CHE	ALB	LIP	o-AMY
0C	ApoA1	ApoB	MALB	LDL-C	HDL-C	тс	CREA-S	CREA-J	UA
(Hilly	CysC	CO2	CK-MB	СК	новн-е	HS-CRP	ASO	RF	>
Alarm	HDL-P	S Prot-N	S Prot-P						
0									
Exit	Demog F1	Options F2	Batch F3	ا ا	tu lear	List F8	Prev F6	Next F7	Save F8

Intuitive software with more functionalities

Complete traceability process

Complete calibration hierarchy and traceability chain are based on ISO standard (EN/ISO17511) from reference system to routine measurement system.

Traceability chain of Mindray measurement system (Glu)

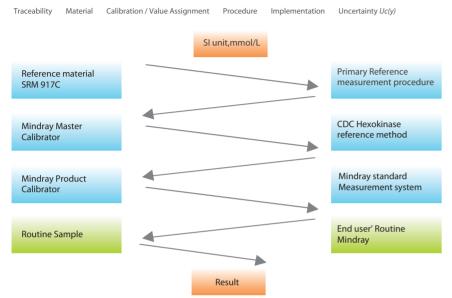


External quality assurance for reference measurement

Mindray participates in RELA (External quality control for reference laboratory).

EQA for Mindray Reference laboratory——RELA

Mindray reference laboratory has passed RELA for 6 consecutive years.

ALT AMY ALP CK GGT GLU LDH TB TP UA UREA

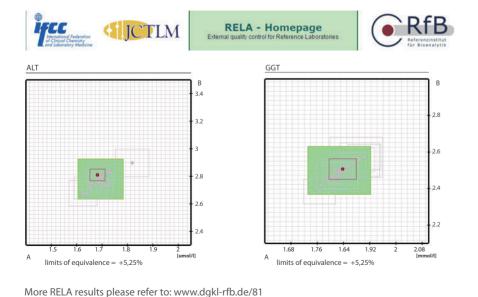

Reagent menu

Hepatic Panel

Alanine Aminotransferase (ALT)

Aspartate Aminotransferase (AST)

Alkaline Phosphatase (ALP)

γ-GlutamylTransferase (γ-GT)

Direct Bilirubin (D-Bil) DSA Method

Direct Bilirubin (D-Bil)VOX Method

Total Bilirubin (T-Bil) DSA Method

Total Bilirubin (T-Bil)VOX Method

Total Protein (TP)

Albumin (ALB)

Total Bile Acids (TBA)

Prealbumin (PA)

Cholinesterase (CHE)

α-L-fucosidase (AFU)

5'-nucleotidase (5'-NT)

Renal Panel

Urea (UREA)

Creatinine (CREA) Modified Jaffé Method

Creatinine (CREA)Sarcosine Oxidase Method

Uric Acid (UA)

Carbon dioxide (CO2)

Microalbumin(MALB)

β2-Microglobulin (β2-MG)

Cystatin C (CysC)

Retinol binding protein(RBP)

Immune Panel

Immunoglobulin A (IgA)

Immunoglobulin G (IgG)

Immunoglobulin M (IgM)

Complement C3 (C3)

Complement C4 (C4)

Diabetes Panel

Glucose (Glu) GOD-POD Method

Glucose (Glu) HK Method

Hemoglobin A1c (HbA1c)

Fructosamine (FUN)

β-Hydroxybutyrate(β-HB)

Cardiac panel

Creatine Kinase (CK)

Creatine Kinase-MB (CK-MB)

Lactate Dehydrogenase (LDH)

 α -Hydroxybutyrate Dehydrogenase(α -HBDH)

High sensitive C-reaction protein (HS-CRP)

Inorganic & Anemia

Iron (Fe)

Ferritin (FER)

Transferrin (TRF)

Calcium (Ca)

Magnesium (Mg)

Phosphate Inorganic (P)

Unsaturated iron binding capacity (UIBC)

Glucose-6-phosphate dehydrogenase (G6PD)

Lipid Panel

Total Cholesterol (TC)

Triglycerides (TG)

HDL-Cholesterol (HDL-C)

LDL-Cholesterol (LDL-C)

Apolipoprotein A1 (ApoA1)

Apolipoprotein B (ApoB)

Lipoprotein(a) [Lp(a)]

Rheumatism Panel

C-reactive protein (CRP)

Rheumatoid Factor (RF)

Antibodies Against Streptolysin O (ASO)

Lung Panel

Adenosine Deaminase (ADA)

 $Angiotens in \ Converting \ Enzyme (ACE)$

Pancreatitis Panel

α-Amylase (α-AMY)

Lipase (LIP)